

DUAL MONO POWER-AMPLIFIER XXVII


Features

- High quality custom-made parts featuring two large toroidal transformers and power supplies for each channel.
- Only carefully selected bipolar transistors used. Each channel has its own dedicated PCB.
- Sophisticated circuitry incorporating non-invasive overload/overheat protection.
- Bi-wire outputs using high quality shrouded sockets.
- RCA and XLR inputs.
- High quality aluminum case and front panel.
- Three-year guarantee.

Technical Specifications:

Power Output (Stereo): 70 Watts per channel, 8 Ohms.
 Input Impedance: 18K Ohms @ 1 KHz
 Frequency Response: -3dB @ 3Hz and 62kHz, ref 1 KHz
 Total Harmonic Distortion: <0.02% at rated power, 1 KHz
 Signal to Noise Ratio: 110 dB A weighted, ref rated output
 Channel Separation: >70dB, 20Hz - 20KHz
 (typically > 95dB @ 1KHz)
 Mains Supply: 110/120V or 220/240V, 50/60Hz
 (factory set)
 Power Consumption: <350VA 8 Ohm load both channels driven
 Dimensions (H x W x D): 115mm x 440mm x 300mm
 Nett Weight (unpacked): 11 Kg
 Gross Weight (Packed): 13 Kg

“a more refined sound...this is proper hi-fi”
 Hi-Fi News

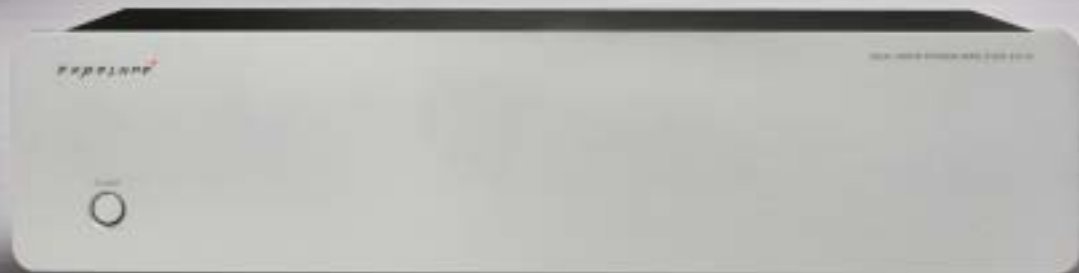

INTEGRATED AMPLIFIER XXV

Features

- High capacity, custom-made toroidal power transformer and power supply capacitors.
- Extruded front panel and sheet aluminium chassis to control resonance and stray electro-magnetic fields.
- High quality capacitors used in the signal path.
- Uniquely tuned short signal and power supply path PCB.
- Cascade circuitry utilised for improved power supply immunity.
- Fast bipolar transistor output stage for dynamic and vivid performance.
- Separate pre-amp output with class A buffer stage.
- Bi-wiring compatible.
- Can be used with an optional internal plug in MC or MM phono board for vinyl replay.
- Full-function remote control.
- Three-year guarantee.

Technical Specifications:

Power Output (2 channels): 80 Watts per channel at 1KHz into 8 Ohms.
 Power Output (2 channels): 160 Watts at 1KHz into 4 Ohms.
 Input Impedance: 19K Ohms minimum (line input)
 Frequency Response: 20Hz - 20 KHz ±0.5dB
 Total Harmonic Distortion: <0.015% at rated output, ref 1 KHz
 Signal to Noise: >110 dB, ref rated output
 Channel Separation: >70dB, 20Hz - 20KHz
 Mains Supply: 110/120V or 220/240V, 50/60Hz (factory set)
 Power Consumption: <400VA 8 Ohm load both channels driven
 Dimensions (H x W x D): 115 mm x 440 mm x 300 mm
 Nett Weight (unpacked): 11.5 kg
 Gross Weight (Packed): 13.5 kg

“legendary heritage, the XXV delivers all you could ask for and more”

